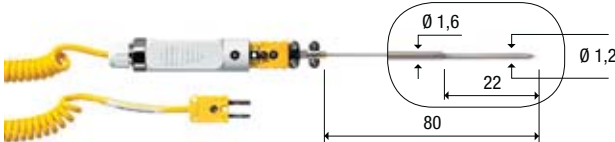
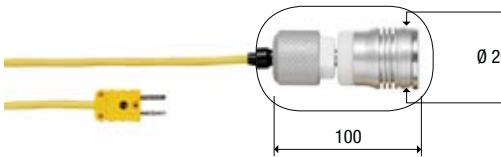



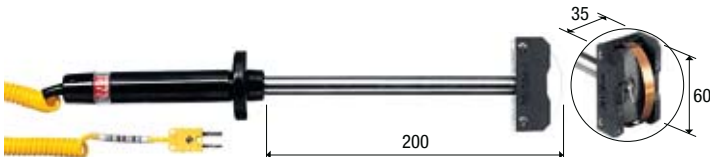

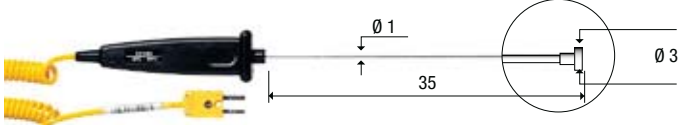




THERMOCOUPLE PROBES TYPE "K" (CHROMEL - ALUMEL) WITH GROUNDED HOT JUNCTION						
CODE	°C max	τ s	DIMENSIONS (mm)			USE
TP 756	200	2s				
TP 757	180	30s	MAGNETIC PROBE FOR CONTACT MEASUREMENTS ON MAGNETIC METALLIC SURFACES 			
TP 758	400	4s	L=150	Ø=4		
TP 758.1	400	4s	L=90	Ø=4		
TP 772	400	3s				
TP 774	250	2s				
TP 776	200	2s				
TP 777	200	3s				
TP 647	300	2s	ACCREDIA calibration up to max. 300°C. 			
TP 647/2	300	2s				
TP 647/3	300	2s				
TP 647/5	300	2s				
TP 647/10	300	2s				
TP 647/20	300	2s				
TP 651	1200	6s	L=1200	Ø=6		
TP 652	1200	6s	L=700	Ø=6		
TP 655	180	2s	 Cable L = 2m			